
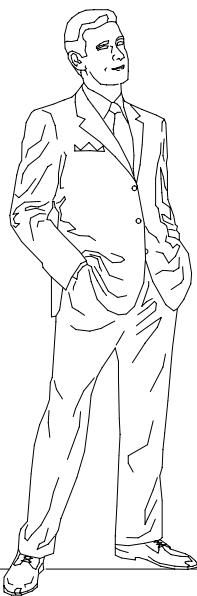
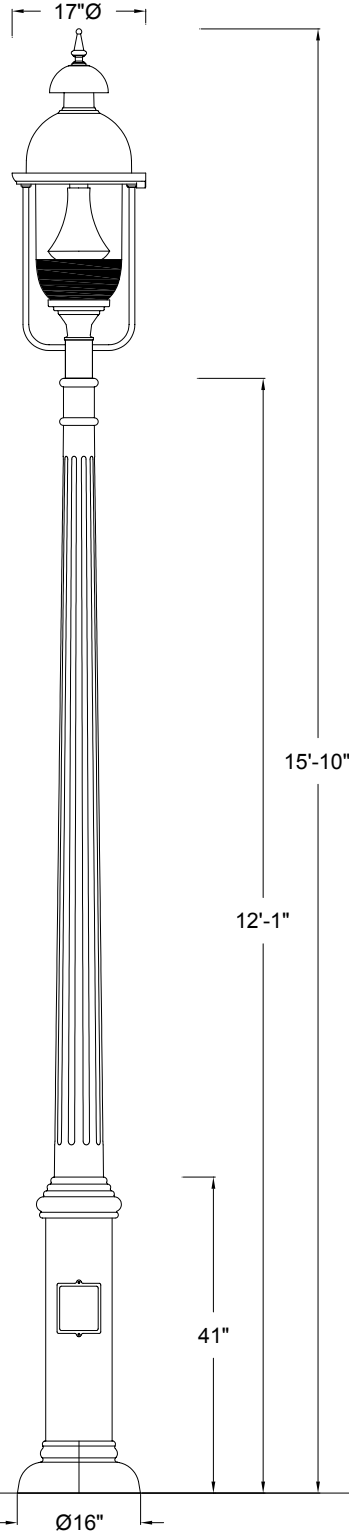


Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____
Date _____

BOTTOM VIEW



(C) 2001 HCI (Heritage Casting & Ironworks). Illustrations are copyrighted. Unauthorized reproduction prohibited. In an ongoing effort to improve quality/design, Heritage reserves the right to modify specifications without notice.

Approval Drawing

Light Std: F136-L-P448-CC

Diffuser Type: Clear

Diffuser Material: Acrylic
U.V. stabilized.

Optical System: Dual cone reflector.

Light distribution: Type V

Luminaire Housing: Cast and spun aluminum. Top is fully hinged for easy access to lamp and ballast.

Ballast: MH high power factor mounted on removable plate. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 100W
Voltage - 120V
Socket - Medium (4KV).

Photocontrol: None

Pole: Cast aluminum

Base Cover: Two piece attached to pole with two stainless steel screws.

Anchor bolts: 4 galvanized 3/4" (19mm) x 24" (610mm) long. Anchor bolts and metal template are supplied by HCI.

Finish: Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

Colour: Black RAL # 9011

Date: Feb.21, 2003 Drawing No: 4326

Model:

F136-L-CAC-100MH-120V-OC-M5-P448-CC

Project: FRENCH QUARTER

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com