

F214




HCI

Heritage Casting & Ironworks

1280 Fewster Drive
Mississauga ON L4W 1A4
sales@hcilighting.com
www.hcilighting.com
Fax (905) 238-9060

Toll-free (800) 267-3175 Tel. (905) 238-2648

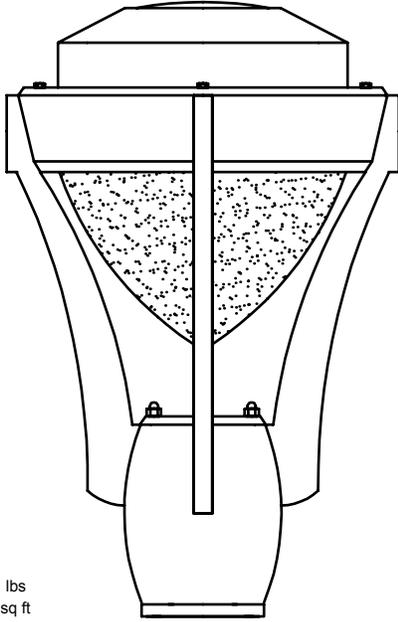

F214-L
Weight: 21 lbs
EPA: 1.65 sq ft

Description. The F214 Series luminaire shall consist of a spun aluminum hood assembly, a stippled polycarbonate diffuser, cast aluminum struts and cast aluminum ballast compartment. The diffuser shall be secured to the gasketed luminaire body with an aluminum spinning. The ballast shall feature quick disconnect plugs for easy ballast maintenance. The ballast shall be factory wired, tested and mounted on a keyholed cast aluminum plate together with a 4kV porcelain socket. Lamps are not included and shall be supplied by others. All electrical components shall be UL listed and labeled. **NOTE:** not for sale in the USA.

Installation. The fixture shall be equipped with a 3-1/2" OD x 6" L tenon or as appropriate for installation on the pole.

Finish. All applicable parts shall receive a standard electrostatically applied thermoset polyester powder coat smooth semi gloss finish with a four part corrosion inhibiting process.

To assemble a catalog number, list all codes sequentially.

JOB:

TYPE:

QTY:

SIZE

F214-L (16"W x 24"H)

DIFFUSER TYPE

FPC Frosted (stippled) Polycarbonate

WPC White (opal) Polycarbonate

LIGHT SOURCE

50 - 175 MH _____W

35 - 150 HPS _____W

CFL Fluorescent _____W

INC Incandescent _____W

VOLTAGE

QT (Quad Tap 120, 208, 240, 277)

TT (Tri Tap 120, 277, 347)

NOTE: Please circle connected voltage. If none is indicated, factory will pre-wire at 120V.

120V Reactor

480 Single

OPTICS

SR-3 hydroformed reflector IES type III

BL bare lamp (suggested with white diffusers)

Photometrics are available in IES format - consult factory or your HCI sales representative.

OPTIONS

FUS internal fusing

PCB luminaire integrated button type photocell

HSS house side shield

COLOR

Black RAL 9011

Green RAL 6005

Bronze RAL 8019

Grey RAL 7012

White RAL 9016

Custom